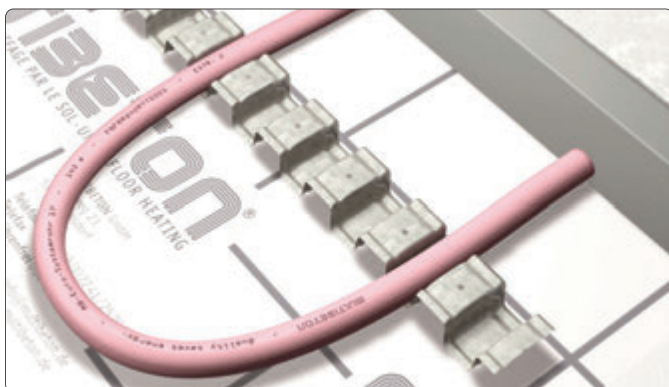


<b>System pipes &amp; system components</b> The MULTIBETON classics	<b>01</b>
<b>Screed additives &amp; reinforcement</b> Products for a superior screed	<b>03</b>
<b>Manifolds</b> Stainless steel manifolds – technology for perfect heat distribution	<b>05 - 06</b>
<b>Multinox - heating &amp; cooling</b> Stainless steel manifolds for heating & cooling	<b>07</b>
<b>Manifold cabinets</b> High-quality manifold cabinets, In-wall or On-wall	<b>09</b>
<b>Control engineering</b> Smart home solutions, wireless & wired	<b>11 - 13</b>
<b>Heating manifold accessories</b> Additions to manifold technology	<b>15 - 18</b>
<b>Connection technology</b> Couplings and clamping fittings	<b>19</b>
<b>Complementary products</b> Installation tools and items for screed and insulation	<b>21 - 23</b>
<b>Software &amp; Services</b> Planning software	<b>24</b>





### MB Euro System pipe 12, 17 and 22

High-heat stabilised copolymer, MB raw material development, UV-stabilised, highly molecular, long-term and ageing-resistant, diffusion protection according to MULTIBETON process, specially packaged; fixed lengths can be produced by arrangement.

010001-100	<b>MB-ER12</b>	12.0 mm x 2.2 mm	<b>100 m coil</b>
010001-200	<b>MB-ER12</b>	12.0 mm x 2.2 mm	<b>200 m coil</b>
010001-300	<b>MB-ER12</b>	12.0 mm x 2.2 mm	<b>300 m coil</b>
010001-500	<b>MB-ER12</b>	12.0 mm x 2.2 mm	<b>500 m coil</b>
010011-200	<b>MB-ER17</b>	17.0 mm x 2.2 mm	<b>200 m coil</b>
010011-300	<b>MB-ER17</b>	17.0 mm x 2.2 mm	<b>300 m coil</b>
010011-500	<b>MB-ER17</b>	17.0 mm x 2.2 mm	<b>500 m coil</b>
010031-500	<b>MB-ER22</b>	22.0 mm x 2.4 mm	<b>500 m coil</b>

### MB System pipe 17

High-heat stabilised copolymer, MB raw material development, UV-stabilised, highly molecular, long-term and ageing-resistant, specially packaged; fixed lengths can be produced by arrangement.

010021-200	<b>MB-SR17</b>	17.0 mm x 2.2 mm	<b>200 m coil</b>
010021-300	<b>MB-SR17</b>	17.0 mm x 2.2 mm	<b>300 m coil</b>
010021-500	<b>MB-SR17</b>	17.0 mm x 2.2 mm	<b>500 m coil</b>

### MB Steel clip rail

1 bundle = 15 rails of 2 m = 30 m, made of galvanized steel, manufacturing tolerance  $\pm 0.8\%$ , perforated for better wall and ceiling mounting

010041-30	<b>MB-CS12</b>		
	MB Steel clip rail 12		<b>30 m bundle</b>
010051-30	<b>MB-CS17</b>		
	MB Steel clip rail 17		<b>30 m bundle</b>



### System components for MB Flat System (FLS-35/27)

080301	<b>MB Lightweight screed (MB-LES)</b>	<b>1 bag = 21 kg</b>
080302	<b>MB Glass fibre mat (MB-GFM), custom length</b>	<b>m<sup>2</sup></b>
080303	<b>MB Thin screed (MB-DES)</b>	<b>1 bag = 25 kg</b>
080304	<b>MB Thin screed Pro (MB-DEP)</b>	<b>1 bag = 25 kg</b>
080305-25	<b>Edge insulation band FLS</b> 50 mm (h) x 8 mm (w)	<b>1 roll = 25 m</b>
080307	<b>Primer FLS</b>	<b>1 can = 10 kg</b>
080308	<b>Fabric tape FLS</b> Width 50 mm	<b>1 roll = 50 m</b>
080309	<b>Adhesive sealing tape FLS</b> Width 60 mm	<b>1 roll = 25 m</b>



### System components for MB Dry Floor (TRB-17)

Attention: These products may have longer delivery times.

080201	<b>MB Load distribution plate (MB-DVP)</b> for TRB-17	<b>m<sup>2</sup></b>
--------	--	----------------------




**MB Screed emulsion standard (MB-Typ E)**

Highly efficient standard screed emulsion: Improvement in workability, flexural strength, compressive strength, adhesion, surface smoothness, rapid drying and temperature distribution of screeds for underfloor heating and cooling. Special properties: MB-Typ E results in unusually high water savings with the various dosages. The small addition of water is even the prerequisite for the quality improvements listed.

020001-20 MB-Typ E

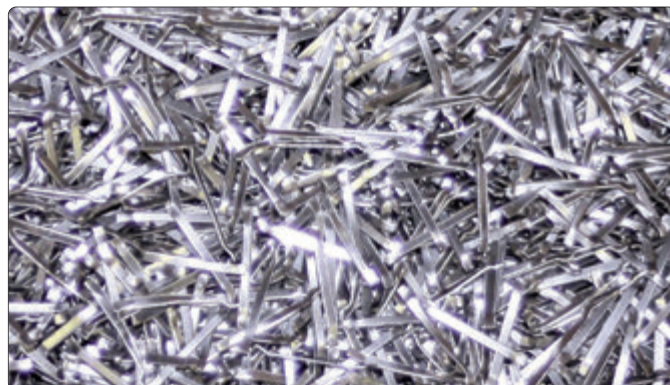
**can of 20 l**
**MB Screed emulsion special (MB-PVP)**

Special screed emulsion: The targeted addition of plastic to the screed mortar improves the finished screed in terms of compaction, flexural strength, compressive strength, adhesion, surface smoothness, quick drying, temperature distribution of underfloor heating and cooling systems, in the abrasion resistance and in the static values. Use as an additive for cement-based fillers, to strengthen cement screeds, as a smooth cement screed, for screed repairs, with normal cement screed and panel mortar, for binders, for flat screeds for MULTIBETON surface heating and for cement-based rapid screeds.

020011-10 MB-PVP

**can of 10 l**

020011-20 MB-PVP

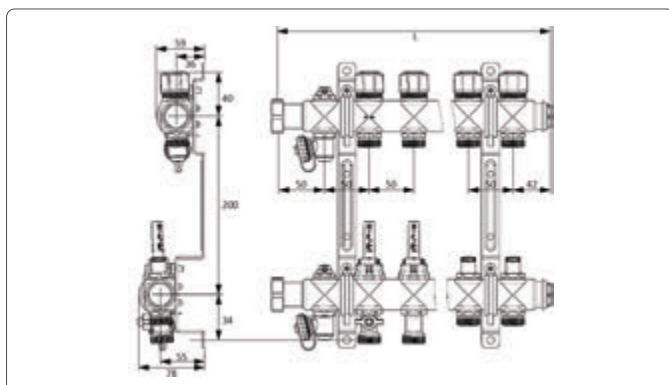
**can of 20 l**

**Steel fibres**

For screed reinforcement of the MB Flat Screed System (EFS-40): length 20mm, width 1.7mm, thickness 0.5mm (KrampeHarex Typ KE 20/1.7 with hooked ends)

020051-20 Steel fibres

**box of 20 kg**





### Manifold 1" standard

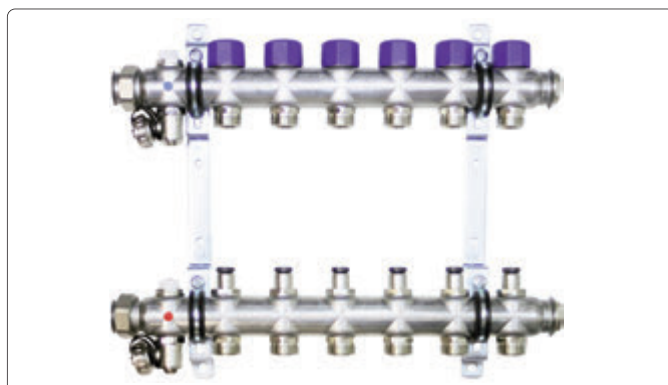
Manifold 1" standard with regulating inserts (meets the DIN 1264-4) for manual hydraulic balancing of the heating circuits, especially low-resistance and recommended for all MB System pipes. Manifold with flow and return bars made of stainless steel (DN 32) according to EN 10088-2, completely pre-assembled, 2 x manual vent valve 1/2", 2 x service valve (flush, fill and drain valve) 1/2", 2 x end plugs 3/4" (all parts nickel-plated).

Outlets: nickel-plated connection nipple 3/4" ET with Euro cone according to DIN V 3838 suitable for connection fittings, spigot distance 50 mm, 2 x union nut 1" IT (nickel-plated) flat-sealing for direct connection of the ball valves;

Return bar: integrated thermostatic valve (constant volume flow = 2.75 m<sup>3</sup>/h, V2A) with blue manual regulation caps and connection thread M30 x 1.5 (prepared for on-site installation of electrothermal actuators);

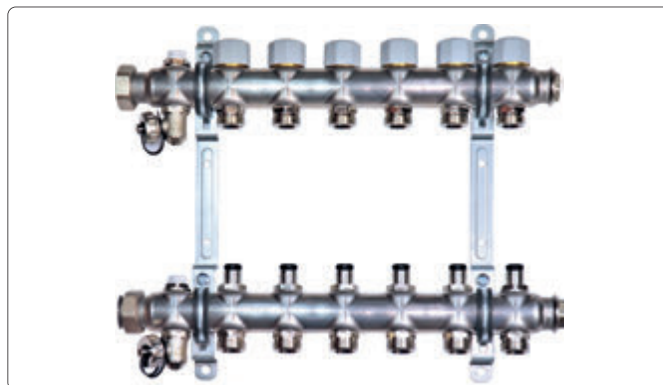
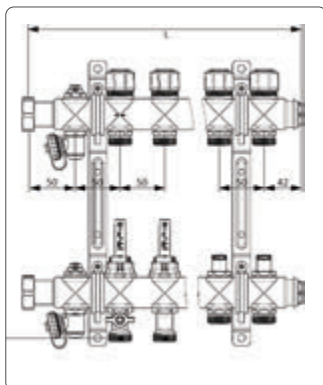
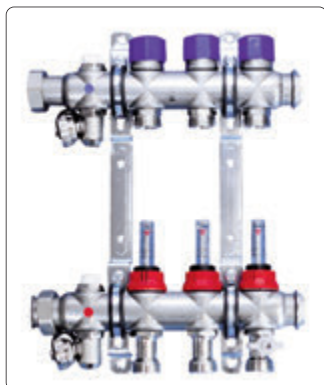
Flow bar: integrated regulating inserts with memory function (constant volume flow = 2.88 m<sup>3</sup>/h, nickel-plated, stroke regulation can be preset) for regulating and shutting off the water flow;

Miscellaneous: room labels, 2 x galvanized double wall brackets (200 mm distance between flow and return beams) with sound insulation insert (DIN 4109), complete with screws and dowels, packed in a protective cardboard box;



030001-2	02 circuits	length (L) 192 mm
030001-3	03 circuits	length (L) 242 mm
030001-4	04 circuits	length (L) 292 mm
030001-5	05 circuits	length (L) 342 mm
030001-6	06 circuits	length (L) 392 mm
030001-7	07 circuits	length (L) 442 mm
030001-8	08 circuits	length (L) 492 mm
030001-9	09 circuits	length (L) 542 mm
030001-10	10 circuits	length (L) 592 mm
030001-11	11 circuits	length (L) 642 mm
030001-12	12 circuits	length (L) 692 mm





### Manifolds 1" flow indicator

Manifolds 1" flow indicator (meets the DIN 1264-4) for manual hydraulic balancing of the heating circuits, especially low-resistance and recommended for all MB System pipes. Manifold with flow and return bars made of stainless steel (DN 32) according to EN 10088-2, completely pre-assembled, 2 x manual vent valve 1/2", 2 x service valve (flush, fill and drain valve) 1/2", 2 x end plugs 3/4" (all parts nickel-plated).

Outlets: nickel-plated connection nipple 3/4" ET with Euro cone according to DIN V 3838 suitable for connection fittings, spigot distance 50 mm, 2 x union nut 1" IT (nickel-plated) flat-sealing for direct connection of the ball valves;

Return bar: integrated thermostatic valve (constant volume flow = 2.75 m<sup>3</sup>/h, V2A) with blue manual regulation caps and connection thread M30 x 1.5 (prepared for on-site installation of electrothermal actuators);

Flow bar: with integrated flow indicator 0-3 l/min with memory function (constant volume flow = 1.23 m<sup>3</sup>/h, V2A) for regulating and shutting off the water flow;

Miscellaneous: room labels, 2 x galvanized double wall brackets (200 mm distance between flow and return beams) with sound insulation insert (DIN 4109), complete with screws and dowels, packed in a protective cardboard box;

030011-2	02 circuits	<b>length (L) 192 mm</b>
030011-3	03 circuits	<b>length (L) 242 mm</b>
030011-4	04 circuits	<b>length (L) 292 mm</b>
030011-5	05 circuits	<b>length (L) 342 mm</b>
030011-6	06 circuits	<b>length (L) 392 mm</b>
030011-7	07 circuits	<b>length (L) 442 mm</b>
030011-8	08 circuits	<b>length (L) 492 mm</b>
030011-9	09 circuits	<b>length (L) 542 mm</b>
030011-10	10 circuits	<b>length (L) 592 mm</b>
030011-11	11 circuits	<b>length (L) 642 mm</b>
030011-12	12 circuits	<b>length (L) 692 mm</b>

### Manifolds 1" constant flow regulators

Manifolds 1" constant flow regulators for automatic hydraulic balancing of the heating circuits, especially low-resistance and recommended for all MB System pipes. Manifold with flow and return bars made of stainless steel (DN 32) according to EN 10088-2, completely pre-assembled, 2 x manual vent valve 1/2", 2 x service valve (flush, fill and drain valve) 1/2", 2 x end plugs 3/4" (all parts nickel-plated).

Outlets: nickel-plated connection nipple 3/4" ET with Euro cone according to DIN V 3838 suitable for connection fittings, spigot distance 50 mm, 2 x union nut 1" IT (nickel-plated) flat-sealing for direct connection of the ball valves;

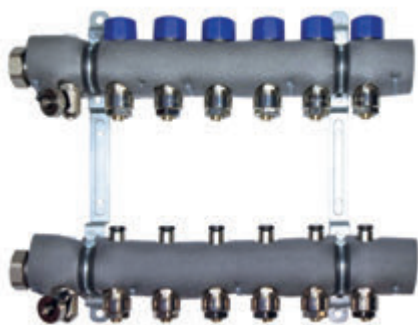
Return bar: integrated constant flow regulators 0-5 l/min in the thermostatic inserts with gray manual control caps and connection thread M30 x 1.5 (prepared for on-site installation of electrothermal actuators);

Flow bar: integrated regulating inserts (constant volume flow = 2.88 m<sup>3</sup>/h, nickel-plated) for shutting off the water flow;

Miscellaneous: room labels, 2 x galvanized double wall brackets (200 mm distance between flow and return beams) with sound insulation insert (DIN 4109), complete with screws and dowels, packed in a protective cardboard box;

030022-2	02 circuits	<b>length (L) 192 mm</b>
030022-3	03 circuits	<b>length (L) 242 mm</b>
030022-4	04 circuits	<b>length (L) 292 mm</b>
030022-5	05 circuits	<b>length (L) 342 mm</b>
030022-6	06 circuits	<b>length (L) 392 mm</b>
030022-7	07 circuits	<b>length (L) 442 mm</b>
030022-8	08 circuits	<b>length (L) 492 mm</b>
030022-9	09 circuits	<b>length (L) 542 mm</b>
030022-10	10 circuits	<b>length (L) 592 mm</b>
030022-11	11 circuits	<b>length (L) 642 mm</b>
030022-12	12 circuits	<b>length (L) 692 mm</b>




**Multinox standard MB-ER17**

consisting of manifold 1" (030001-2 to 030001-12) incl. insulation set (040021-2 to 040021-12) and connection fittings (050002).

090371-2	02 circuits	<b>length (L) 192 mm</b>
090371-3	03 circuits	<b>length (L) 242 mm</b>
090371-4	04 circuits	<b>length (L) 292 mm</b>
090371-5	05 circuits	<b>length (L) 342 mm</b>
090371-6	06 circuits	<b>length (L) 392 mm</b>
090371-7	07 circuits	<b>length (L) 442 mm</b>
090371-8	08 circuits	<b>length (L) 492 mm</b>
090371-9	09 circuits	<b>length (L) 542 mm</b>
090371-10	10 circuits	<b>length (L) 592 mm</b>
090371-11	11 circuits	<b>length (L) 642 mm</b>
090371-12	12 circuits	<b>length (L) 692 mm</b>

**Multinox standard MB-ER12**

incl. connection fittings (050001), otherwise as 090371-2 to 090371-12; art. no. 090361-2 to 090361-12

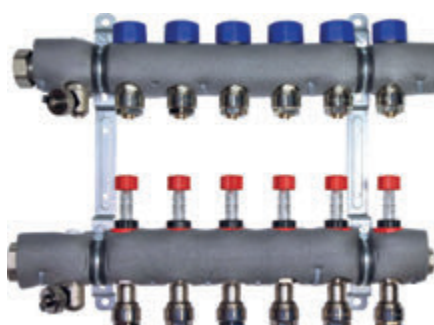
**Multinox standard MB-ER22**

without connection fittings but incl. clamping joints ET (050033) and connection set (050112-1), otherwise as 090371-2 to 090371-12; art. no. 090374-2 to 090374-12

**Multinox constant flow regulators MB-ER17**

consisting of manifold 1" (030021-2 to 030021-12) incl. insulation set (040021-2 to 040021-12) and connection fittings (050002).

090373-2	02 circuits	<b>length (L) 192 mm</b>
090373-3	03 circuits	<b>length (L) 242 mm</b>
090373-4	04 circuits	<b>length (L) 292 mm</b>
090373-5	05 circuits	<b>length (L) 342 mm</b>
090373-6	06 circuits	<b>length (L) 392 mm</b>
090373-7	07 circuits	<b>length (L) 442 mm</b>
090373-8	08 circuits	<b>length (L) 492 mm</b>
090373-9	09 circuits	<b>length (L) 542 mm</b>
090373-10	10 circuits	<b>length (L) 592 mm</b>
090373-11	11 circuitse	<b>length (L) 642 mm</b>
090373-12	12 circuits	<b>length (L) 692 mm</b>

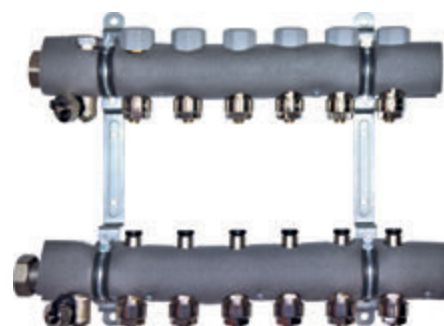

**Multinox flow indicators MB-ER17**

consisting of manifold 1" (030011-2 to 030011-12) incl. insulation set (040021-2 to 040021-12) and connection fittings (050002).

090372-2	02 circuits	<b>length (L) 192 mm</b>
090372-3	03 circuits	<b>length (L) 242 mm</b>
090372-4	04 circuits	<b>length (L) 292 mm</b>
090372-5	05 circuits	<b>length (L) 342 mm</b>
090372-6	06 circuits	<b>length (L) 392 mm</b>
090372-7	07 circuits	<b>length (L) 442 mm</b>
090372-8	08 circuits	<b>length (L) 492 mm</b>
090372-9	09 circuits	<b>length (L) 542 mm</b>
090372-10	10 circuits	<b>length (L) 592 mm</b>
090372-11	11 circuits	<b>length (L) 642 mm</b>
090372-12	12 circuits	<b>length (L) 692 mm</b>

**Multinox flow indicators MB-ER12**

incl. connection fittings (050001), otherwise as 090372-2 to 090372-12; art. no. 090362-2 to 090362-12


**Multinox constant flow regulators MB-ER12**

incl. connection fittings (050001), otherwise as 090373-2 to 090373-12; art. no. 090363-2 to 090363-12




**In-wall cabinet** for manifold 1"

The built-in frame is made of hot-dip galvanised sheet steel. The cabinet feet are height-adjustable (180 mm). The screed baffle plate is removable and adjustable. The pipe deflection rail is removable. The front panel with four insertion latches is removable and adjustable (110 – 150 mm) and is completely galvanised and painted pure white (RAL 9016). The plug-in door with turning bolt is integrated in the front panel. Completely packed in a protective box, the fronts are additionally packed. Adjustable support rails for manifold bars are available. Locks are optionally available.

060001-1	size 1	489 x (712-892) x (111-150) mm
060001-2	size 2	724 x (712-892) x (111-150) mm
060001-3	size 3	1024 x (712-892) x (111-150) mm
060001-4	size 4	1474 x (712-892) x (111-150) mm

060701-1	Door and frame lacquered for 060001-1
060701-2	Door and frame lacquered for 060001-2
060701-3	Door and frame lacquered for 060001-3
060701-4	Door and frame lacquered for 060001-4

060711-1	Screed baffle plate lacquered for 060001-1
060711-2	Screed baffle plate lacquered for 060001-2
060711-3	Screed baffle plate lacquered for 060001-3
060711-4	Screed baffle plate lacquered for 060001-4


**On-wall cabinet** for manifold 1"

The On-wall cabinet is made of galvanised sheet steel and painted pure white (RAL 9016). The cabinet feet are height-adjustable (180 mm), the screed baffle plate is removable. Plug-in door with plastic turning bolt, locks are optionally available. The On-wall cabinet is completely packed in a protective box. Adjustable support rails for distributor bars are available.

060011-A	size A	496 x (622-802) x 125 mm
060011-B	size B	731 x (622-802) x 125 mm
060011-C	size C	1031 x (622-802) x 125 mm
060011-D	size D	1481 x (622-802) x 125 mm

060741	Cylinder lock with key, for all cabinets
060742	Insertion latches for all In-wall cabinets






060721-1	Screed baffle plate zinc-plated for 060001-1
060721-2	Screed baffle plate zinc-plated for 060001-2
060721-3	Screed baffle plate zinc-plated for 060001-3
060721-4	Screed baffle plate zinc-plated for 060001-4

Cabinet selection	Cabinet 1" Standard, Flow indicator, Constant flow regulator	Cabinet 1" with calorimeter installation set vertical	Cabinet 1" with calorimeter installation set horizontal	Cabinet 1" Fixed value control set 1"	Cabinet 1" Fixed value control set 1" with calorimeter installation set vertical and 2 fittings	Cabinet 1" Fixed value control set 1" with calorimeter installation set horizontal and 2 fittings
02 circuits	1/A	1/A	2/B	2/B	2/B	3/C
03 circuits	1/A	1/A	2/B	2/B	2/B	3/C
04 circuits	1/A	1/A	2/B	2/B	2/B	3/C
05 circuits	2/B	2/B	2/B	3/C	3/C	4/D
06 circuits	2/B	2/B	3/C	3/C	3/C	4/D
07 circuits	2/B	2/B	3/C	3/C	3/C	4/D
08 circuits	2/B	2/B	3/C	3/C	3/C	4/D
09 circuits	2/B	2/B	3/C	3/C	4/D	4/D
10 circuits	3/C	3/C	3/C	3/C	4/D	4/D
11 circuits	3/C	3/C	3/C	4/D	4/D	4/D
12 circuits	3/C	3/C	4/D	4/D	4/D	4/D
13 circuits	3/C	3/C	4/D	4/D	4/D	4/D
14 circuits	4/D	4/D	4/D	4/D	4/D	-



**Symondo Sensor** (room thermostat)

This digital individual room thermostat controls and measures

-  the temperature for heating and cooling,
-  the humidity,
-  the air quality,
-  the CO<sub>2</sub> value and it is
-  WiFi enabled.

The Symondo sensor is equipped with a built-in multi-sensor and digital communication via 1-wire bus or with an integrated WLAN module. Intuitive operation via integrated touch surfaces and LEDs, which are discreetly integrated into the plastic panel in standby mode. Constant monitoring of the air quality via colored status LEDs. Versatile installation options for flush mounting in standard switch frames or as a surface-mounted version.

070063 Symondo Sensor (wired)

070064 Symondo Sensor WLAN (wireless)

**Symondo Controller** (Symondo Box Control)

Elegant controller for controlling the Symondo Box with a capacitive TFT touch panel, optionally with an integrated WLAN module and a suitable smartphone app for convenient remote control and optimisation of the heating system.

070062 Symondo Controller (wired)

070061 Symondo Controller WLAN (wired)

**Symondo Box** (strip terminal)

This strip terminal for heating and cooling works in conjunction with at least one Symondo Controller.

- Convenient commissioning, system configuration and system maintenance by touch via the Symondo Controller or via the martdevice app;
- Switchover from heating to cooling mode and permanent dew point monitoring based on the relative humidity in the room;
- The Symondo Box controls up to 8 Symondo Sensors and 32 actuators.
- Symondo is modularly expandable to network several Symondo boxes;
- Selectable functions for free outputs: weather-compensated heating circuit, boiler contact, etc.;

070060 Symondo Box

Power supply	230 VAC
Internal operating voltage	24 VDC, 5 VDC, 3.3 VDC
Relay outputs 230 VAC (NO contact)	9
Relay outputs potential-free with changeover contact	2
0 - 10 V or PWM outputs	3
24 VDC voltage output for external devices	max. 12 W
LED for operating states	14
Temperature sensor inputs	*01 up to 20
Compatible room thermostats	*02 up to 8 Symondo Sensors
Digital interface	*03 2 x CAN & 1-Wire
Heating pump	*04 230 VAC on/off/PWM
Heating mixer	*05 0 - 10 V or PWM
Heating zones and actuators	*06 8 x 4
Heat request	*07 yes
Fan coil function via 0 - 10 V/PWM	yes
Heating/cooling switch	*07 yes
Cooling request	*07 yes
Dehumidifier	*08 yes
Heating operating times per day	*09 8 per zone
Comfort function for fast heating	*09 for each zone
Energy-saving heating mode Eco Eco	*09 for each zone
Cooling operating times per day	*09 8 per zone
Comfort function for fast cooling	*09 for each zone
Energy-saving cooling mode Eco	*09 for each zone
Dew point calculation	*10 yes
PID control for constant room temperature	yes

\*01 By 1-wire bus up to 20 sensors, additional temperature sensors by CAN network or WLAN;

\*02 Up to 8 Symondo Sensors can be supplied by the Symondo Box with 5 V DC operating voltage from the 1-Wire bus.

\*03 Two separate CAN networks, 1 x private (apartment), 1 x heating system (building);

\*04 Via 230 VAC relays on/off, or speed-controlled via PWM;

\*05 Flow temperature control is done according to room temperature, optionally weather-compensated or combination of weather-compensation with room temperature influence;

\*06 Up to 8 heating zones with up to 4 x 230 VAC actuators as NO or NC design also with PID control;

\*07 Potential-free relay contact, 0 - 10 V or PWM signal or via CAN network;

\*08 Free assignable function on one of the relay or V outputs;

\*09 Adjustable via Symondo Controller;

\*10 Via Symondo Controller/Sensor in each zone where it is installed separately.



symondo

**Symondo Sensor On-Wall**

Mounting set consisting of a single frame (10 mm) and a surface frame (40 mm total height) for 55 mm insert; Provides sufficient space for Symondo Sensors. Pure white (RAL9003) plastic surface mount frame, 80mm x 80mm, matte eroded finish with UV protection.

070070 Symondo Sensor On-Wall

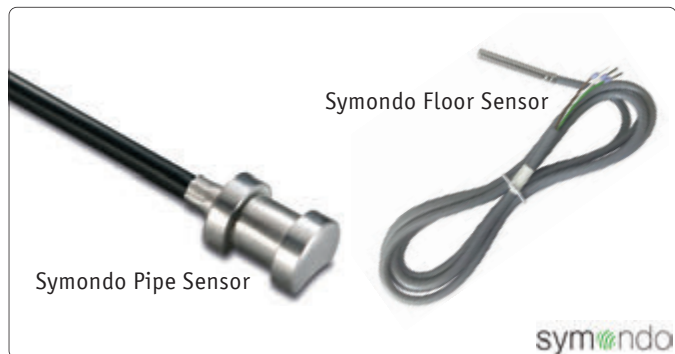


symondo

**Symondo Sensor Frame**

Single frame for 55 mm insert for Symondo Sensor, 80 mm x 80 mm matt eroded finish (pure white, RAL9003) with UV protection.

070071 Symondo Sensor Frame



symondo

**Symondo Pipe Sensor**

For use on the 1-wire bus of the Symondo Box as a pipe contact sensor;

070072 Symondo Pipe Sensor

**Symondo Floor Sensor**

For use on the 1-Wire bus of the Symondo Box as a floor sensor;

070073 Symondo Floor Sensor



symondo

**Symondo Outside Sensor**

For use on the 1-Wire bus of the Symondo Box as an outside sensor;

070074 Symondo Outside Sensor



symondo

**Symondo Controller Cable**

Shielded twisted pair CAN connection cable (6-core) as a 100 m roll, 3 x 2 x 0.22 mm<sup>2</sup>;

070075 Symondo Controller Cable

**Symondo Sensor Cable**

Shielded twisted pair 1-wire connection cable as a 100 m roll, 2 x 2 x 0.75 mm<sup>2</sup>;

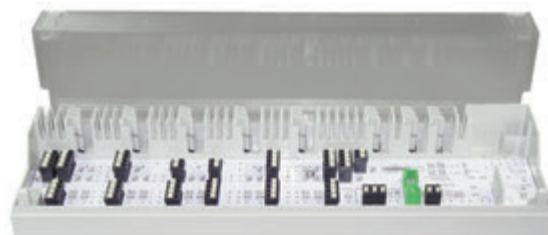
070076 Symondo Sensor Cable


**Actuator Basic**

Currentless closed, M30 x 1.5, ready to plug in, noiseless, can be mounted upside down, rotary knob for manual operation at any time;

070001 Actuator Basic  
230 V, 50/60 Hz,  
070002 Actuator Basic  
24 V, 0-60 Hz

Protection class	IP54
Stellweg	4.5 mm
Actuating force	100 N
Media temp.	max. 100 °C,
Ambient temp.	max. 60 °C
Surge	min. 2,500 V
	nach EN 60730-1
Width	39 mm
Operating output	1.2 W
Connection cable 2 x 0.75 mm <sup>2</sup>	
	acc. EN 60730
	length 0.8 m


**Strip terminal Basic**

For wiring the actuators, up to 6 or 10 room controllers and 15 or 21 actuators can be connected.

070011 **Strip terminal Basic 230/24 V up to 6 zones**  
only for heating  
070011-1 **Strip terminal Basic 230/24 V up to 10 zones**  
only for heating  
070012 **Strip terminal Basic H/K with pump logic up to 6 zones**  
for heating and cooling  
070012-1 **Strip terminal Basic H/K with pump logic up to 10 zones**  
for heating and cooling


**Thermostat Basic On-wall**

Room thermostat (RAL 9010) with setting wheel, on-wall version, power supply 230 V, 230 V output, temperature range 5-30 °C, frost protection function, can be limited and blocked, no connection option for floor sensor.

070021 Thermostat Basic On-wall

**Thermostat Basic In-wall**

Room thermostat (RAL 9010) with setting wheel, in-wall version, power supply 230 V, 230 V output, temperature range 5-30 °C, frost protection function, can be limited and blocked. Can be used for the switch series from the manufacturers Busch-Jaeger, Berker, Jung, GIRA, Merten, Legrand, Peha and Hager.

070023 Thermostat Basic In-wall


**Thermostat Basic On-wall LED**

Room thermostat (RAL 9010) in a programmable version with LED display, on-wall version, power supply 230 V, 230 V output, temperature range 5-35 °C, frost protection function, actual temperature display, limitable, anti-blocking function of the valve spindle, PWM control, seven pre-programmed schedules, heating/cooling function, floor sensor connection option.

070022 Thermostat Basic On-wall

**Thermostat Basic In-wall LED**

Room thermostat (RAL 9010) in a programmable version with LED display, in-wall version, power supply 230 V, 230 V output, temperature range 5-35 °C, frost protection function, actual temperature display, limitable, anti-blocking function of the valve spindle, PWM control, seven pre-programmed schedules, heating/cooling function, floor sensor connection option.

070024 Thermostat Basic In-wall LED





#### Due point sensor Basic

For integration into an existing NC/NO system, supply voltage 24 V. For switching off if there is a risk of condensation during the cooling application.

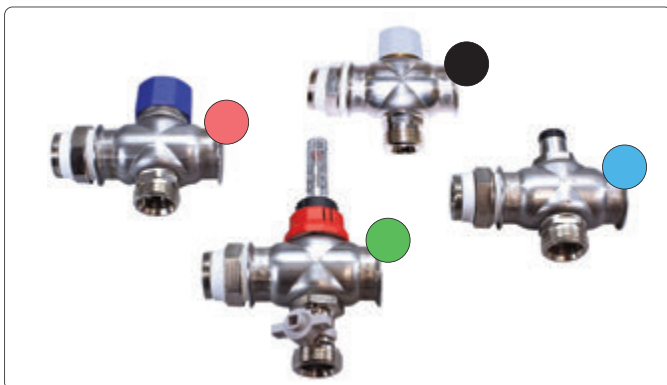
070707 Due point sensor Basic



#### RTB

The return temperature limiter keeps the room temperature constant at  $\pm 0.5$  °C (installation dimensions: length 65 mm, depth 65 – 75 mm),  $\frac{3}{4}$ " x  $\frac{3}{4}$ " ET, for installation in the return; Use of applicable standards and laws;

050111 RTB


**Extension for stainless steel manifold 1"**

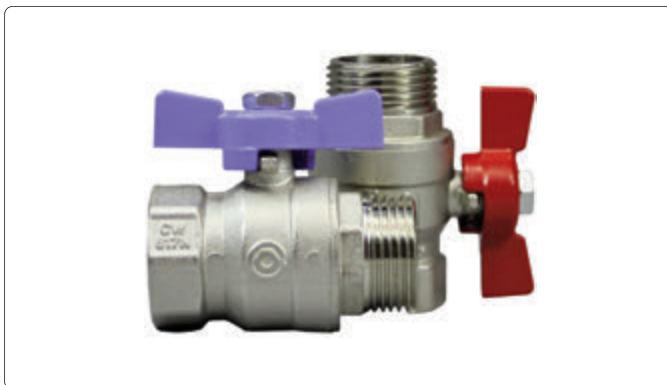
Flow and return components for extending manifolds 1" with additional heating circuits; installation length 80 mm, incl. O-ring seal for manifold end plugs;

- |        |   |
|--------|---|
| 040001 | ● Extension thermostatic valve<br>(KVS-value = 2,75 m <sup>3</sup> /h), prepared for on-site installation of electrothermal actuators |
| 040002 | ● Extension regulation insert<br>(KVS-value = 2,88 m <sup>3</sup> /h)   |
| 040003 | ● Extension flow indicator<br>0-3 l/min (KVS-value = 1,12 m <sup>3</sup> /h)  |
| 040005 | ● Extension constant flow regulator<br>0-5 l/min, prepared for on-site installation of electrothermal actuators                       |

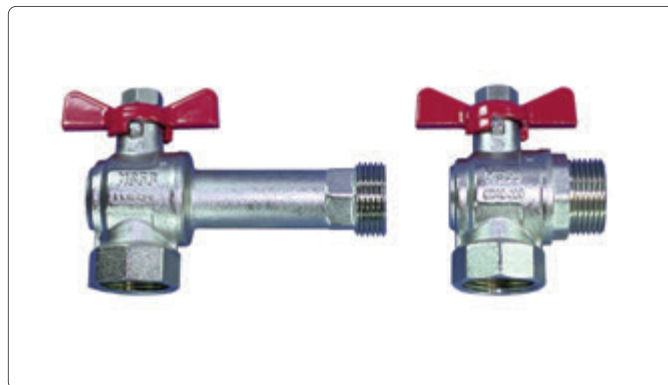

**Insulation set 1"**

For insulating the manifold 1" when heating and cooling, easy to slip over, even when retrofitting, sufficient clips for fastening, screws (M6 x 25) for better connection of the clamps to the wall bracket of the manifold.

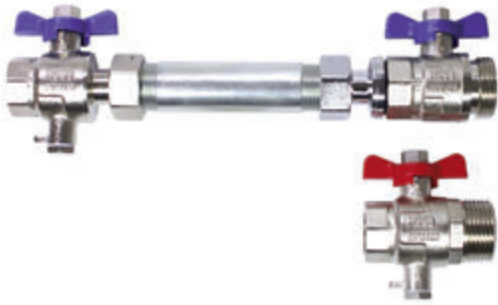
040021-2	2 circuits	040021-8	8 circuits
040021-3	3 circuits	040021-9	9 circuits
040021-4	4 circuits	040021-10	10 circuits
040021-5	5 circuits	040021-11	11 circuits
040021-6	6 circuits	040021-12	12 circuits
040021-7	7 circuits		


**Ball valve set 1"**

- |        |   |
|--------|---|
| 040033 | Two ball valves 1", red and blue, flat sealing, length without thread 56 mm, length with thread 72 mm, incl. flat seal 1" |
|--------|---|


**Corner ball valve set 1"**

- |        |  |
|--------|--|
| 040032 | Corner ball valve set 1" incl. seal, red |
|--------|--|


**Calorimeter installation set horizontal**

The flow section contains 1 x ball valve  $\frac{3}{4}$ " IT x 1" ET with immersion sensor connection IT. The installation section, 110 mm long, up to  $Q_n = 2.5 \text{ m}^3/\text{h}$ , is located in the return and contains 1 x ball valve 1" ET x  $\frac{3}{4}$ " union screw connection and 1 x ball valve  $\frac{3}{4}$ " IT x  $\frac{3}{4}$ " union screw connection with immersion sensor connection IT. The immersion sensor connections in flow and return are suitable for immersion sensors DS (DIN EN 1434-2) ET M10x1 for measuring the flow and return temperature. The connections for flow and return lines are  $\frac{3}{4}$ " IT.

 040051 Calorimeter installation set **horizontal**

**Calorimeter installation set vertical**

The flow section contains 1 x 90° bend  $\frac{3}{4}$ " ET x 1" ET such as 1 x ball valve  $\frac{3}{4}$ " IT x  $\frac{3}{4}$ " ET union screw connection with immersion sensor connection IT. The installation section, 110 mm long, up to  $Q_n = 2.5 \text{ m}^3/\text{h}$ , is located in the return and contains 1 x corner ball valve 1" ET x  $\frac{3}{4}$ " union screw connection and 1 x ball valve  $\frac{3}{4}$ " IT x  $\frac{3}{4}$ " union screw connection with immersion sensor connection IT. The immersion sensor connections in flow and return are suitable for immersion sensors DS (DIN EN 1434-2) ET M10x1 for measuring the flow and return temperature. The connections for flow and return lines are  $\frac{3}{4}$ " IT.

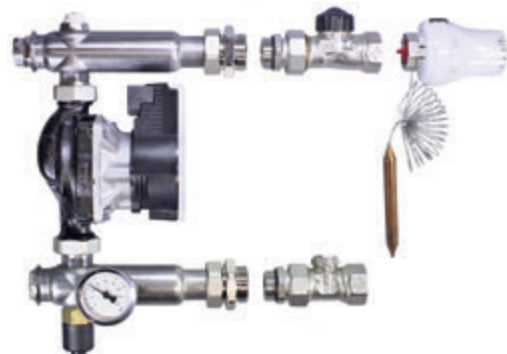
 040052 Calorimeter installation set **vertical**

**Connection elbow 90°**

040081 1" ET x 1" union screw connection, flat sealing


**Screw connection**

When using fixed value control set 1" and calorimeter installation set

 040082  $\frac{3}{4}$ " ET x 1" IT

**Fixed value control set**

For underfloor heating, for connection to systems with higher flow temperatures, e.g. radiators, for reducing the flow temperature on the primary side, incl. pump Wilo-Para 15-130/4-20/SC. MULTIBETON recommends using the strip terminal H/K with pump logic.

040071-4 Fixed value control set



**Strap-on thermometer**

040706 Strap-on thermometer 0 - 60 °C



**Thermostatic valve insert E** (for stainless steel manifold 1")

040707 Thermostatic valve insert E to install actuators



**Regulation insert** (for stainless steel manifold 1")

040708 Regulation insert



**Connection nipple 3/4" short** (for stainless steel manifold 1")

040709 Connection nipple 3/4" short with Eurocone for thermostatic valve insert and regulation insert



**Flow indicator** (for stainless steel manifold 1")

040701 Flow indicator 0 - 5 l

040703 Flow indicator 0 - 3 l



**Connection nipple 3/4" long** (for stainless steel manifold 1")

040704 Connection nipple 3/4" long with Eurocone for flow indicator



**Red cap**

040710 Red cap for flow indicator



**Service valve** (for stainless steel manifold 1")

040711 Service valve for rinsing, filling, and draining the manifold



### Adjustment wrench

040705 Tool for setting the flow rate  
with flow indicator 0 - 3 l



### Adapter for actuator M (for brass manifold)

040714 VA 04 M 30 x 1 for manifold 1"  
040716 VA 10 M 30 x 1.5 for manifold 5/4"



### Thermostatic valve insert M (for brass manifold 1")

040713 Thermostatic valve insert 3/8" ET  
for actuator M 30 x 1"



### Actuator M (for brass manifold)

040717 Actuator 230 V without adapter  
040718 Actuator 24 V without adapter



### Thermostatic valve insert M (for brass manifold 5/4")

040715 Thermostatic valve insert 1/2" ET  
for actuator M 30 x 1,5"



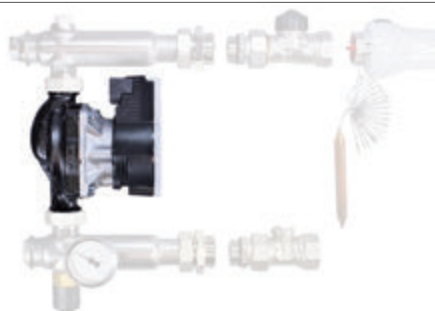
### Thermostatic head with sensor

040720 for fixed value control set 1",  
control range 20 - 50 °C



### Safety temperature switch

040719 for fixed value control set 1",  
shutdown temperature 55 °C



### Pump Wilo Para 15-130/4

040712 for fixed value control set 1",  
with pump plug and cable





**Connection fitting** (for stainless steel manifold 1")

050001      ¾" IT for 12.0 mm x 2.2 mm  
050002      ¾" IT for 17.0 mm x 2.2 mm



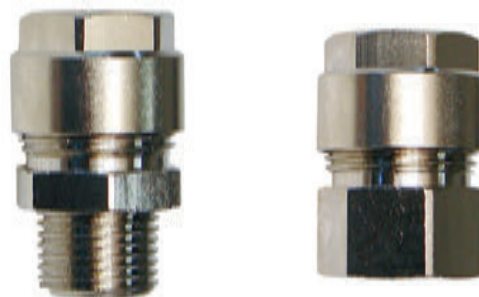
**Coupling**

050011      12.0 mm x 2.2 mm  
050012      17.0 mm x 2.2 mm



**Angle coupling**

050021      12.0 mm x 2.2 mm  
050022      17.0 mm x 2.2 mm



**Clamping joint ET**

050031      ½" ET for 12.0 mm x 2.2 mm  
050032      ½" ET for 17.0 mm x 2.2 mm  
050033      ¾" ET for 22.0 mm x 2.4 mm

**Clamping joint IT**

050041      ½" IT for 12.0 mm x 2.2 mm  
050042      ½" IT for 17.0 mm x 2.2 mm



**Connection set**

For connecting the RTB to the heating circuit manifold and for connecting the MB-ER22 to the manifold in conjunction with an screw connection ET 22.0 mm x 2.4 mm

050112-1      Connection set ¾" IT x ¾" IT, length 30 mm



**MB Welding sleeve**

Only to extend the MB-SR17

050101      MB Welding sleeve 17  
050102      MB Welding bend 17

**10 pc./bag**  
**10 pc./bag**






**Pipe support fixed**

Fixing of the MB system pipes at a fixed angle of 90°, e.g. in the manifold cabinet or for wall and ceiling ducts, no sharp edges or burrs, excellent sound insulation properties, highly heat-resistant, extremely stable nylon

080001 Pipe support fixed


**Pipe support vario**

Fixation of the MB system pipes up to 90°, e.g. in the manifold cabinet or for wall and ceiling ducts, 153 mm long

080002 Pipe support vario

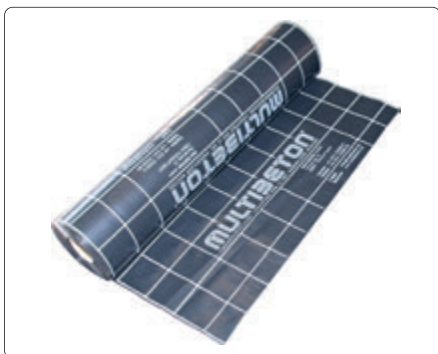

**Protection tube**

Black, slotted, as pipe ducts in movement joints, 30 cm long/protection tube

080015-15 17,0 x 2,2 mm **50 pc./15 m**

080015-50 17,0 x 2,2 mm **50 m/roll**

080016-50 22,0 x 2,4 mm **50 pc./box**


**MB-PEF**

Polyethylene foil printed with MULTIBETON installing grid (10 cm) and guaranteed to be 0.2 mm thick

080011sw

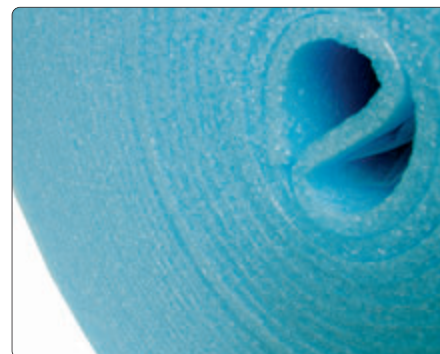
**200 m<sup>2</sup>/roll**


**MB-SKB**

Adhesive tape for sealing the MB-PEF with liquid screed, tested and proven even at sub-zero temperatures, 5 cm wide

080013-66

**66 m/roll**


**Edge insulation strip**

with overlap foil, 150 mm (h) x 10 mm (w)

080012-25

**25 m/roll**


**Expansion joint profile FLS**

80 mm (h) x 10 mm (w)

080306-80 Expansion joint profile FLS

**1 profile = 1 m**


**Hold-down grid**

Against floating with liquid screed (e.g. ESF-55/50), 2 m wide, made of HDPE, mesh size 11 mm x 4 mm

080014-200 Hold-down grid

**200 m<sup>2</sup>/roll**

080014-KL Hold-down grid

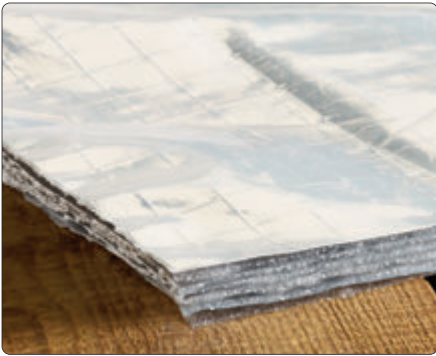
**custom length**


**Dry fill**

For leveling, filling and insulating against heat, cold and noise made from the purest natural raw materials; can be used unbound in liquid screed

080351-60

**60 l/bag**


**Foil insulation**

Multi-layer heat and impact sound insulation, approx. 6.5 mm flat  
 080352-20 **20 m<sup>2</sup>/roll**


**Sealing roll**

Moisture barrier with adhesive strip to protect insulation and floor surfaces against rising damp according to DIN/EN, roll size 1.25 m x 40 m; thickness: 3 mm foam backing + 0.3mm PE film = 3.3mm  
 080017-50 **50 m<sup>2</sup>/roll**


**Sealing tape**

Self-adhesive moisture barrier to protect insulation and floor surfaces against rising damp according to DIN/EN, roll size 0.02 m x 15 m; thickness: 3 mm foam backing + 0.3mm PE film = 3.3mm  
 080017-15 **15 m/roll**


**Pulley**

Assembly aid consisting of a deflection pulley with screw clamp for variable and supporting pipe routing  
 080124 Pulley


**Fixing anchor**

The anchor is used for short-term directional guidance of the MB system pipes on the insulation layer. This assembly aid can be removed again after laying.  
 080115 Fixing anchor 1 bag = 20 pc.


**Installation tools**

The MB installation device (MB-VT and MB-VH) can be borrowed or ordered on a license basis. The toolboxes are provided on loan.

- 080101 MB-VT (installation heating boiler)
- 080102 MB-VH (downcoiling unit)
- 080103 Schuko plug adapter France
- 080112 Toolbox for TRB-17
- 080113 Toolbox for FLS 35/27



**MB-KWS** (cooling water station for MGA-40 & MWA)  
Consisting of booster pump, pressure hose, suction hose and  
Geka couplings  
080141 MB-KWS

on loan



**Clip rail cutter**  
Cutting the MB Steel clip rails (MB-CS17/12)  
080121 Clip rail cutter



**Pipe cutter**  
To cut MB System pipes  
080122 Pipe cutter



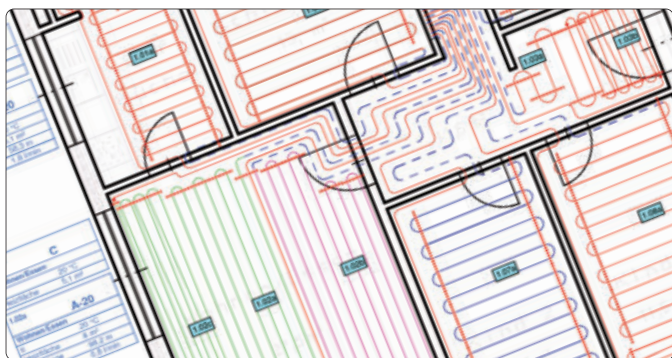
**Binding machine**  
The binding machine for fixing the MB System pipes to a reinforcement (e.g. MFF & MTB) is provided for rent against a deposit and fee. Availability should be checked at least 4 weeks prior to site use.  
080131 deposit  
080301 loan fee up to 2,999 m MB System pipe  
080302 loan fee starting from 3,000 m MB System pipe



**Binding wire**  
1 roll is sufficient for approx. 120 bindings, which corresponds to approx. 100 m MB Euro system pipe 22 (MB-ER22) or MB Euro system pipe 17 (MB-ER17), depending on the binding frequency.  
080132 Binding wire **ca. 100 m/roll**



**Starter kit**  
Consisting of pipe cutter, clip rail cutter, coupling, connection fitting, lighter and folding ruler  
080123 Starter kit



### **Multiplaner**

Consisting of HT2000 with fully integrated MULTIBETON database  
as online version incl. CAD module and heat load calculation

000265      Multiplaner      **annual licence fee**