




Project:			
Client:			
Building element/floor/room:		Screed layer:	
Installation company:		Screed work completed on:	
Start of functional heating with	°C T _V on:	Functional heating with +5 K step to	°C T _V on:
Functional heating with +5 K step to	°C T _V on:	Functional heating with +5 K step to	°C T _V on:
Functional heating with +5 K step to	°C T _V on:	Functional heating with +5 K step to	°C T _V on:
Functional heating with +5 K step to	°C T _V on:	Functional heating with +5 K step to	°C T _V on:
End of functional heating on:		Function heating interrupted? from:	to:
Was the heated floor area free? ☐ yes ☐ no		Were the rooms ventilated without draughts? ☐ yes ☐ no	
The system was released for further construction work at an outside temperature of °C on:			
Client:		Installation company:	
Site management/architect:		After functional heating, it is not yet ensured that the screed has reached the prescribed residual moisture for the floor covering to be applied. Further heating and unheating may be necessary.	

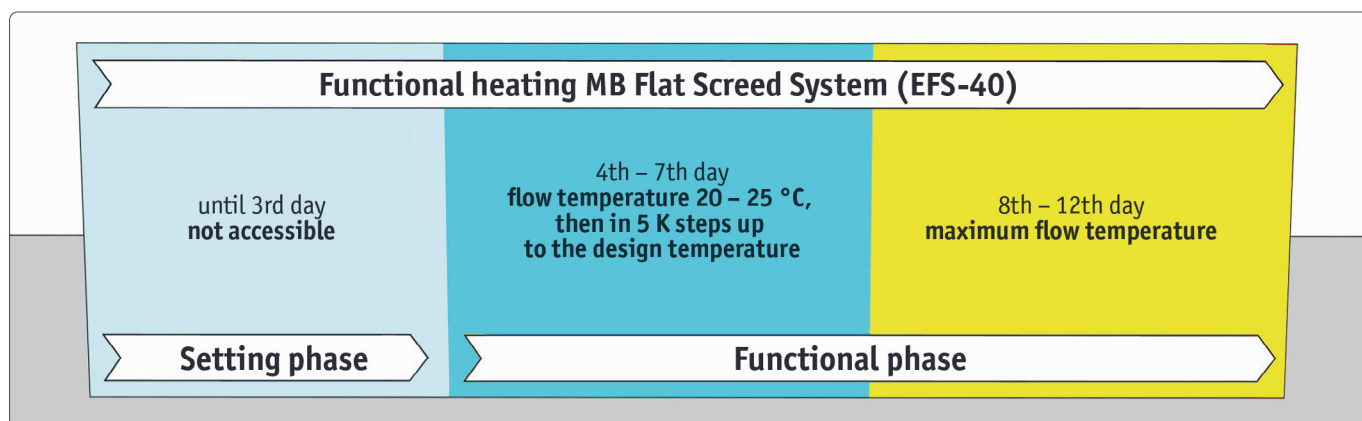